


CUPS ile Yazıcı Kurulumu

Lokal/Network yazıcı kurmak ve/veya paylaşmak isterken CUPS servisi de kullanılmaktadır.

CUPS servisi ile yazıcı kurmak için:

- İnternet tarayıcıya **localhost:631** yazılarak servise bağlanılır

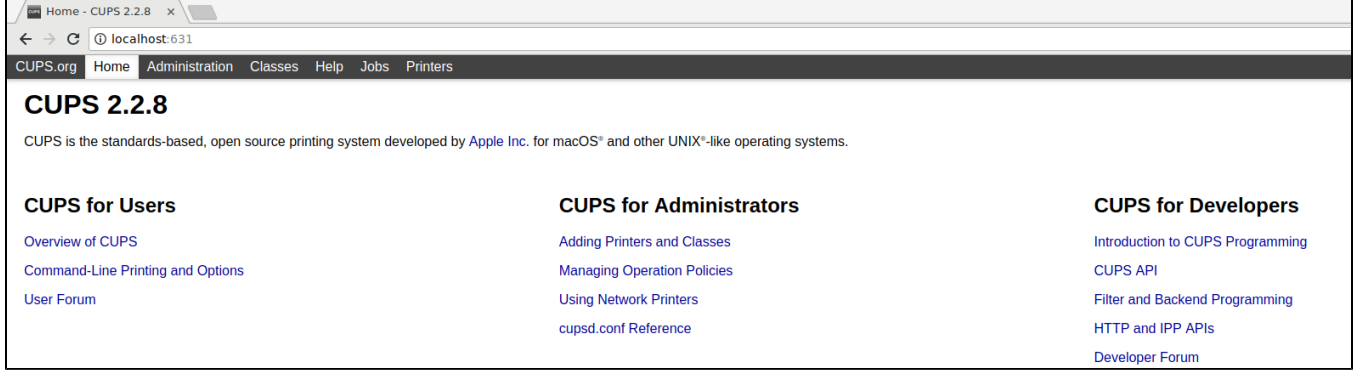

- Printers sekmesinden yazıcı ekleme adımına geçilir



- Tanımlanmak istenben lokal veya network yazıcı seçilir

CUPS.org Home Administration Classes Help Jobs Printers

Add Printer

Add Printer

Local Printers: ☐ CUPS-BRF (Virtual Braille BRF Printer)

Discovered Network Printers:

Other Network Printers: ☐ AppSocket/HP JetDirect
☐ Internet Printing Protocol (https)
☐ Backend Error Handler
☐ LPD/LPR Host or Printer
☐ Internet Printing Protocol (ipp)
☐ Internet Printing Protocol (ipp)
☐ Internet Printing Protocol (ipp)
☐ Internet Printing Protocol (http)

Continue

CUPS.org Home Administration Classes Help Jobs Printers

Add Printer

Add Printer

Connection:

Examples:

http://hostname:631/ipp/
http://hostname:631/ipp/port1

ipp://hostname/ipp/
ipp://hostname/ipp/port1

lpd://hostname/queue

socket://hostname
socket://hostname:9100

See "[Network Printers](#)" for the correct URI to use with your printer.

Continue

- Yazıcının marka ve modeli uygun sürücü ile kurulabilmesi için seçilir.

Add Printer

Add Printer

Name: yazıcı

Description:

Location:

Connection: socket://0.0.0.0

Sharing: Do Not Share This Printer

Make: (Fuji Xerox)
Apollo
Apple
ARGOX
Brother
Canon
CIAAT
Citizen
Compaq
Dai Nippon Printing

Continue

Or Provide a PPD File: Dosya Seç Dosya seçilmedi

Add Printer

Add Printer

Add Printer

Name: yazıcı

Description:

Location:

Connection: socket://0.0.0.0

Sharing: Do Not Share This Printer

Make: Canon Select Another Make/Manufacturer

Model: Canon BJ-30 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-50 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-55 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-80 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-85 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-210 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-240 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-250 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-1000 - CUPS+Gutenprint v5.2.13 (en)
Canon BJC-2000 - CUPS+Gutenprint v5.2.13 (en)

Or Provide a PPD File: Dosya Seç Dosya seçilmedi

Add Printer

- Uygun marka model seçimlerinden sonra yazıcı kullanıma hazır hale gelecektir. Son olarak gelişmiş ayarları yapabileceğiniz bu istenilen ayarlamalar yapılabilir veya öntanımlı ayarları ile kullanıma başlanabilir.

Set Printer Options

Set Default Options for yazıcı

General Printer Features Common Printer Features Extra 1 Output Control Common Output Control Extra 1 Output Control Extra 2 Output Control Extra 4 Banners Policies

General

Media Size: A4

Color Model: Grayscale

Color Precision: Normal

Media Type: Plain Paper

Media Source: Auto Sheet Feeder

Print Quality: Standard

Resolution: Automatic

Shrink Page If Necessary to Fit Borders: Shrink (print the whole page)

Set Default Options